


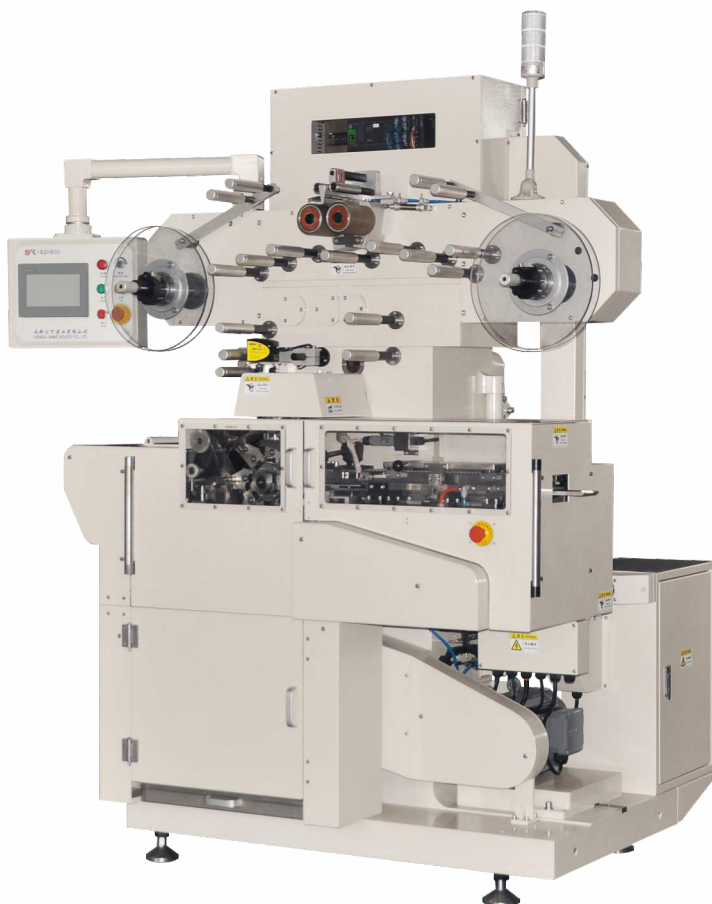

Main Data

Output

- 650 pcs/min

Size Range

- Length: 20-40 mm
- Width: 12-22 mm
- Height: 6-12 mm
Special sizes upon request

Connected Load

- 4.5 kw

Utilities

- Cooling water consumption: 5 l/min
- Water temperature: 10-15 °C
- Water pressure: 0.2 MPa
- Compressed air consumption: 4 l/min
- Compressed air pressure: 0.4-0.6 MPa

Wrapping Materials

- Wax paper
- Aluminum paper
- PET

Wrapping Material Dimensions

- Reel diameter: 330 mm
- Core diameter: 60-90 mm

Machine Measurements

- Length: 1630 mm
- Width: 1020 mm
- Height: 1950 mm

Machine Weight

- 2000 kg

Special Features

- PLC control, Touch screen HMI and Integrated control
- Paper splicer system
- Servo driven wrapping materials compensation, positioned fold wrapping
- No candy no paper, automatic stop when candy jam appears, automatic stop when wrapping material run out
- Modular design, easy to maintain and clean
- CE certification

Combinations

- BZH can be combined with SANKE's Mixer UJB300, Extruder TRCJ130, Cooling tunnel ULD, Stick wrapping machine BZT as a chewing gum/bubble gum production line

BZH

CUTTING & WRAPPING MACHINE

BZH is designed for cutting and fold wrapping chewing gums, bubble gums, toffees, hard and soft caramels, milky candies and other soft candy products. BZH is capable for candy rope cutting and fold wrapping (End/Bottom Fold) with single or double papers

